




ECO




Inverter actuated
Electric motor
16 kW



Lithium iron
phosphate battery
LiFePO4 - 21,5 kWh
(48 V - 420 Ah)

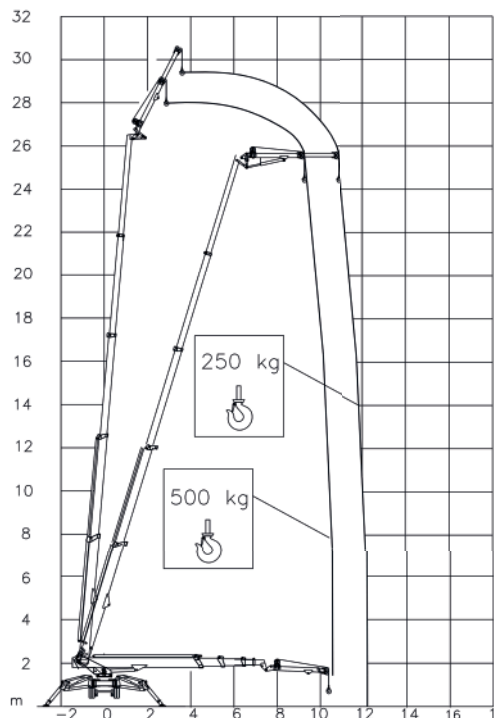

500 kg	250 kg
10 m	11,6 m

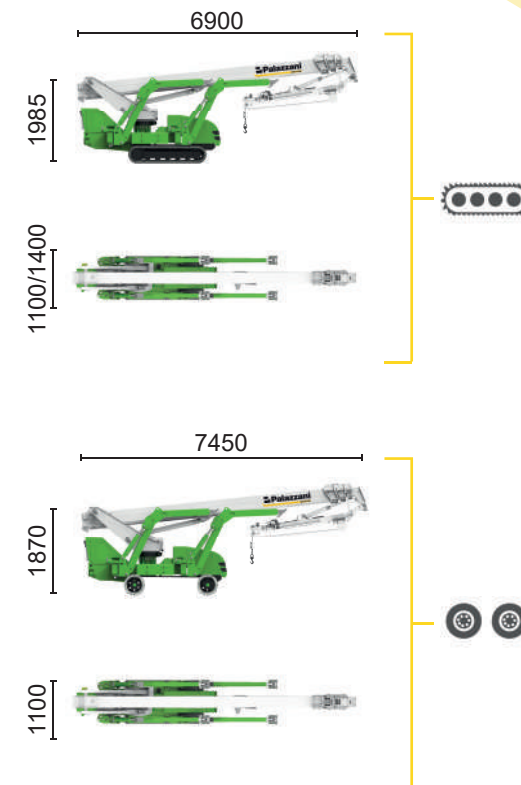

Model	Track	Height (m)	Reach (m)	Capacity (kg)	Rotation (°)	Dimensions (cm)	Max. Angle (°)	Min. Height (m)	Max. Height (m)	Max. Slope (%)	Travel Speed (km/h)	Weight (kg)	Capacity (kN)	Pressure (kN/m²)	Pressure (kN/m²)
XTJ 32/C		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	32%	1,2 km/h	5940 kg	35 kN	2,43 kN/m²	4,78 kN/m²
XTJ 32/R		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	18%	1,2 km/h	5940 kg	35 kN	2,43 kN/m²	4,78 kN/m²

Available power options:
BI-ENERGY (DIESEL+AC)

The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



NC 938 A 24