

With Us, You can

HIGH

GREEN

SAFE



24,4 m




10,7 m




230 kg



Bi-energy
Eco



Crawlers
Wheels

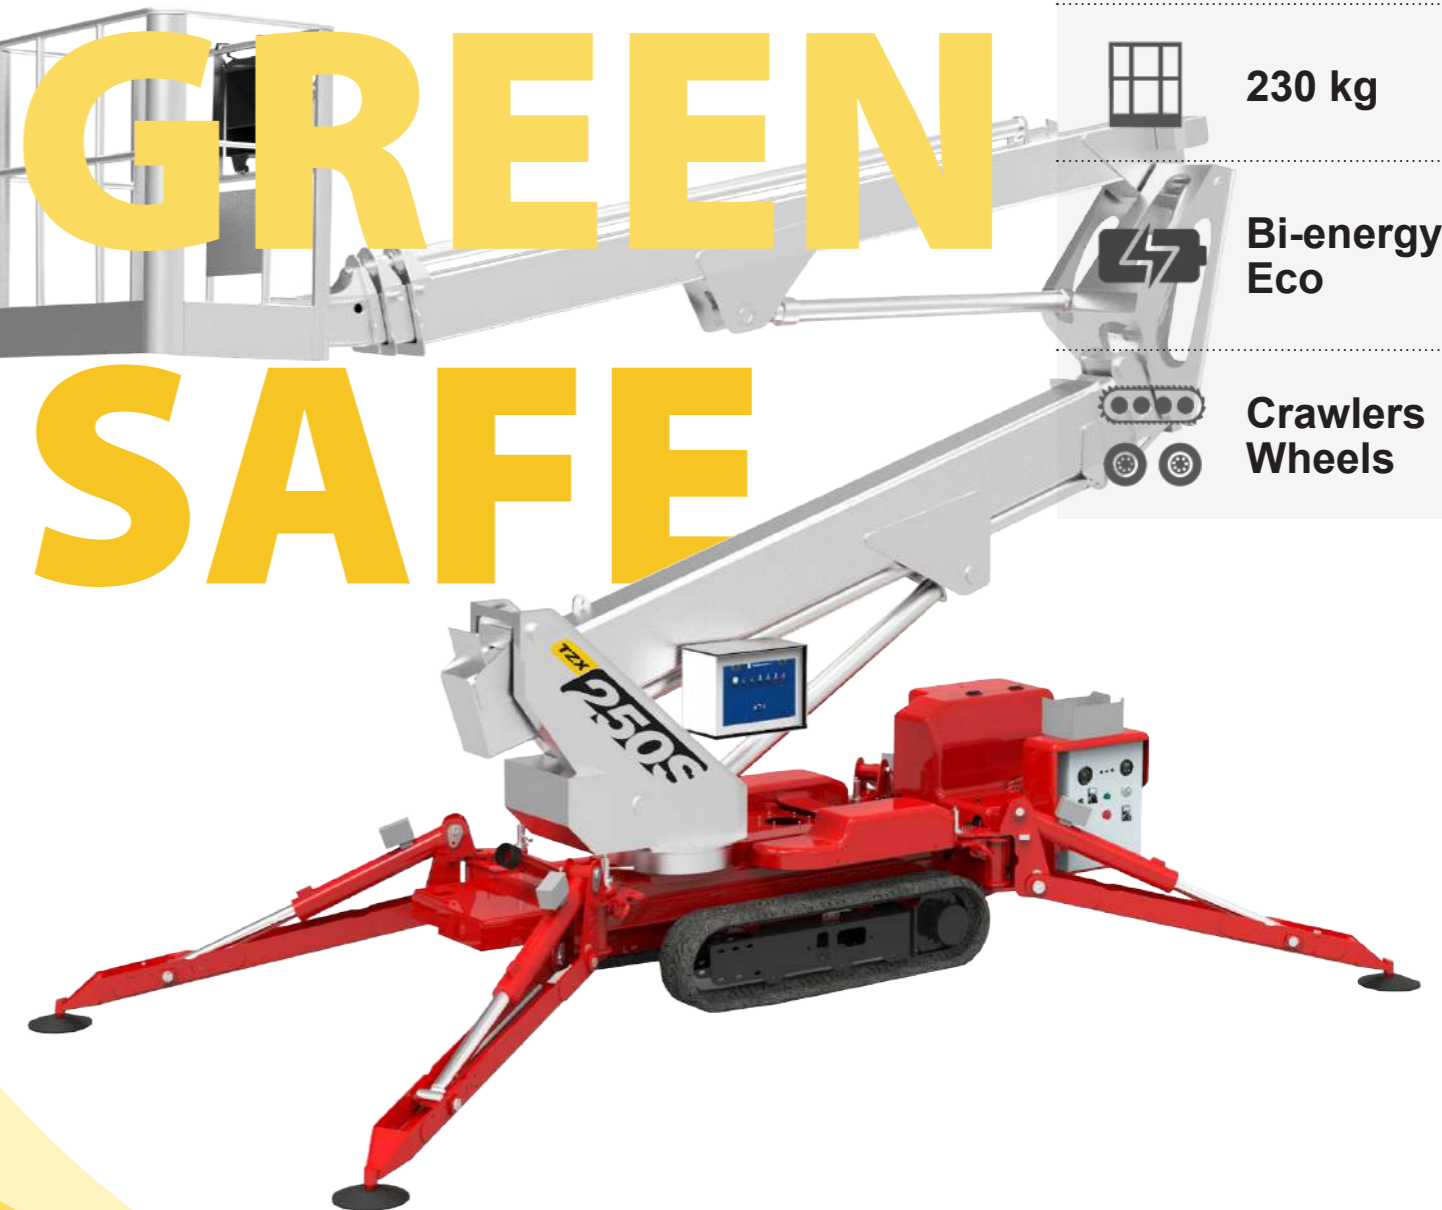


STANDARD EQUIPMENT

- CANBUS electronics
- Hydraulic transmission on non-marking rubber tracks with 4 speeds
- Hydraulic set-up with 4 independent outriggers, of the rotating type
- 2 aluminium made articulated double telescopic booms
- Safe working load 120/250 kg
- Aluminium cage 140x70x110 cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 60° + 60°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Area limiting system according to load and set-up (supplementary moment sensing system)
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language

BI-ENERGY
(Diesel + AC)



ECO
(AC + Battery)

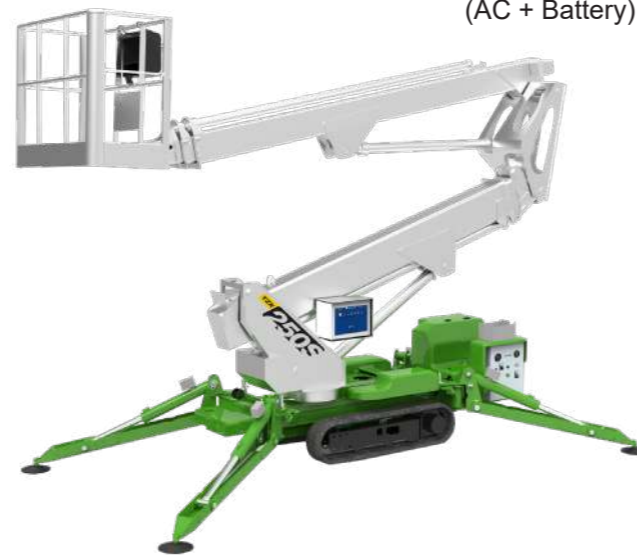

AIR/WATER SUPPLEMENTARY LINE ALONG THE BOOM WITH INTERNAL HOSE



PROTECTION OF OUTRIGGERS' CYLINDERS



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS



CONTROL FOOT PEDAL ON THE CAGE



PADS FOR OUTRIGGERS



"RETURN TO HOME" FUNCTION



DIAGNOSTIC CABLE KIT



EMERGENCY ELECTROPUMP KIT



GROUNDING CABLE INSIDE THE BOOM



FLASHING LIGHTS ON THE STABILIZERS



CUSTOMIZED COLOURS



LED LIGHT



RADIO CONTROL



INTER-PHONIC COMMUNICATION SYSTEM



ELECTRONIC ANEMOMETER



DRINK HOLDER IN THE BASKET



HANDS HEATER IN THE BASKET



36 MONTHS OF WARRANTY ON THE BATTERY



BASKET STAIRS

